LTR	RevNo	Revision note	Date	Signature	Checked
⚠1	V3.0	MODIFY:CABLE COOR, MOLDED COLOR, PACKING, ADD SBG LOGO	09,AUG,2002		

CONFIGURATION:

(P1)DB25M	(P2)CN36M
1	1
18	19
2	2
19	20
3	3
19	21
4	4
20	22
5	5
20	23
6	6
21	24
7	7
21	25
8	8
22	26
9	9
22	27
10	10
24	28
11	11
23	29
12	12
24	28
13	13
24	28
14	14
25	30
16	31
25	30
15	32
23	29
17	36
25	30
25	30
23	29
SHIELD	SHIELD

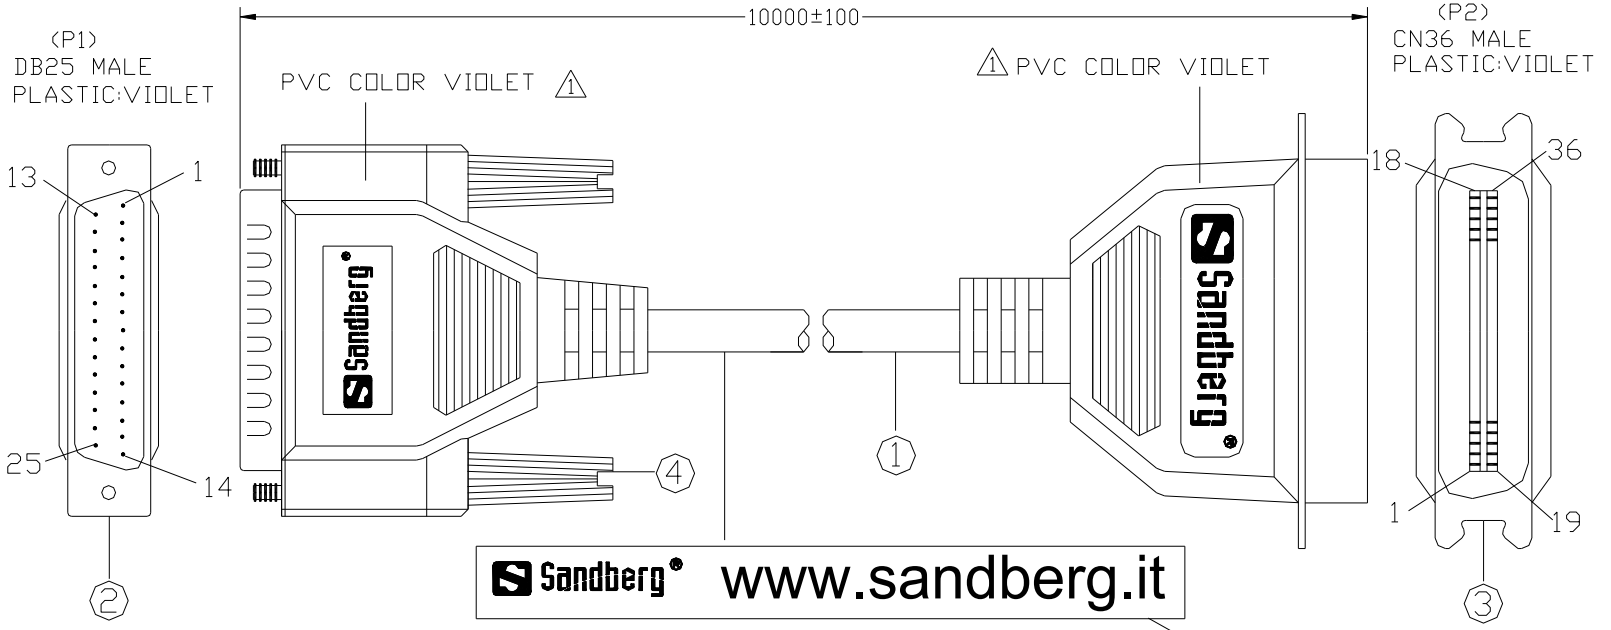

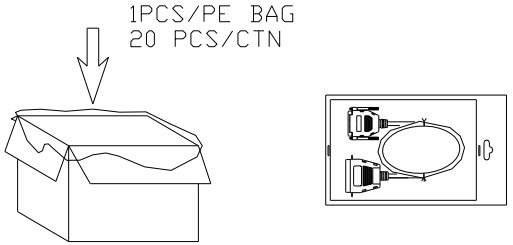

NOTE:
1.CABLE COLOR: PURE WHITE, CABLE IMPRINT BLACK
Sandberg www.sandberg.it COLOR TEXT
2.SBG LOGO ON CONNECTORS' MOLDED
3.TEST:OPEN/SHORT 100% TEST
4.PACKING:W/BLISTER[6]+2*STICKERS-BAR CODE
⚠1 20PCS PACKED IN AN EXPORT CARTON

RANGE	0~10	11~25	26~40	41~60	61~80	81~100	X
TOLERANCE(±)	0.10	0.15	0.20	0.25	0.30	0.35	2%

NO.	PART NAME	Q'TY	SPECIFICATION
4	THUMB SCREW	1	#4-40UNC TYPE
3	CONNECTOR	1	CN36 MALE MOLDED TYPE
2	CONNECTOR	1	DB25 MALE MOLDED TYPE
1	CABLE	1	#28, IEEE 1284, UL20276,18P+1+AL/MY+BRAID, O.D.:8.0
			PURE WHITE COLOR PVC JACKET ⚠1

TITLE: SBG DB25M/CN36M MOLDED TYPE	Scale	Unit	Rev.	Dwg no.
		mm	V3.0	501-97

DRN BY	CHK BY	APE BY

(ªF²ð) ¡w ¹F ¹q ¤l ¼t
ON-TECH ELECTRONIC FACTORY(CHINA)